



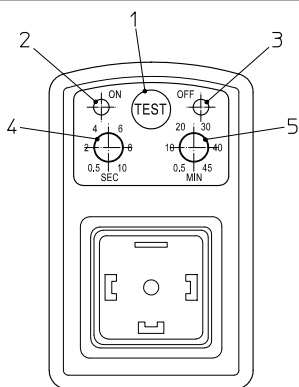

## Drawing Reference

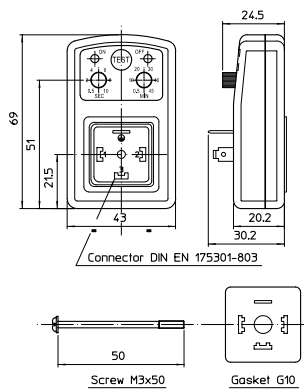

## FEATURES

The condensate removal timer is a plug-on controller specially design for drain valves. The unit offers an easy time cycle programming. The draining time can be set with the "ON" trimmer between 0.5 and 10 seconds. The "OFF" trimmer allows to adjust the delay time between two draining cycles from 0.5 to 45 minutes. The unit is ready to control the valve as soon as the power is switched on. The ON/OFF sequence will be repeated so long as the unit is fed. Two LEDs indicate the output status. A "TEST" button is provided to check the cycle settings and to restart the control sequence from the output status "ON".

## USE

- ▶ Condensate drainage system
- ▶ Timed systems

## TECHNICAL SPECIFICATION

- ▶ **Supply voltage:** 24 to 240V AC/DC±10% 50/60Hz
- ▶ **Output voltage:** same as supply voltage
- ▶ **Load current:** max.1A
- ▶ **Standby current:** 8mA max
- ▶ **Operating temp. range:** -40°C to +60°C
- ▶ **Connector:** EN 175301-803 / ISO 4400
- ▶ **Environmental protection:** IP65 (assembled with delivered gaskets)
- ▶ **Housing dimensions:** 69 x 43 x 21mm
- ▶ **On time:** 0.5 to 10 seconds
- ▶ **Off time:** 0.5 to 45 minutes
- ▶ **Scale accuracy:** ±10%
- ▶ **Indicators:** Green LED – On phase;  
Red LED – Off phase.

## MATERIALS

- ▶ **Shell:** ABS-PA 765
- ▶ **Gasket:** NBR (nitrile)
- ▶ **Description:**
  1. Push-button TEST
  2. Green Led not supplied: output power present (ON)
  3. Red Led load supplied: output power absent (OFF)
  4. Trimmer "ON": regulation time "ON"
  5. Trimmer "OFF": pause time regulation "OFF"

## AVAILABLE ON REQUEST

- ▶ Connectors for SV (to be order separately)
- ▶ Pg 9 (6÷8mm) or Pg 11(8÷10mm)
- ▶ In the near future available also with UL approval.
- ▶ In accordance with RoHS.